


Valid only at time of printing


Construction

- 1. Optical fiber, multimode 50/125/245
- 2. Buffer material ePTFE
- 3. Sheath material colour Thermoplastic natural
- 4. Buffer material ePTFE
- 5. Braided strain relief material Aramid fiber
- 6. Jacket material colour Fluoropolymer yellow

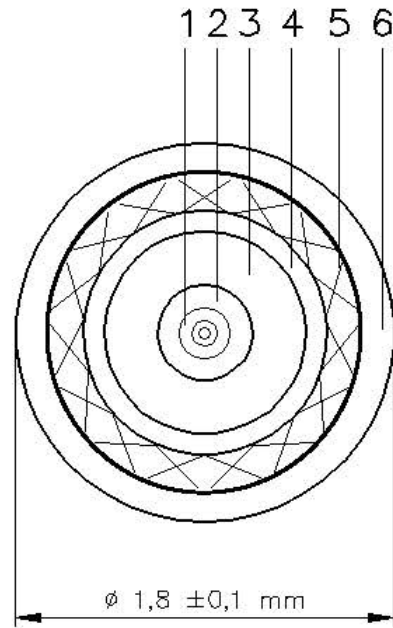

Characteristics

- Operating temperature range -65°C to +135°C
- Weight 4 g/m max.
- Tensile strength 200 N max.
- Optical Loss $\leq 5,0 \text{ dB/km at } 850 \text{ nm}$
 $\leq 3,0 \text{ dB/km at } 1300 \text{ nm}$
- Bandwith OM3

Ersatz für / Replacement for		Ersetzt durch / Replaced by		Formular Beschreibung / Description	
				Benennung / Description Fibre Optic Simplex Cable OM3	
D	17.05.18	SH	11873		
Revision	Date	Author	PLFECO no.		
 W. L. GORE & ASSOCIATES GMBH Nordring 1 • 91785 Pleinfeld • Germany Tel. +49 9144 6010 • Fax +49 9144 6816 gore.com				Identnr. / Ident No. GSC-13-84943-04	Seite / Page 1/1